


HFE19-90

MINIATURE HIGH POWER LATCHING RELAY

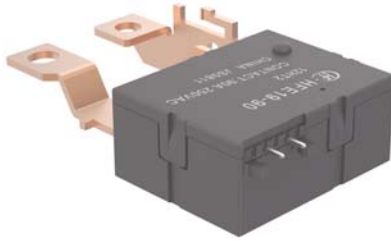

Features

- 90A Latching relay
- Electrical endurance 10000ops
- According to IEC62055-31:UC2
- Contact resistance $\leq 0.45m\Omega$

CONTACT DATA

Contact arrangement	1A, 1B
Contact resistance 1)	Typ.: $0.45m\Omega$ max.(at 90A) ²⁾
Contact material	AgSnO ₂
Contact rating	90A 220VAC
Max. switching voltage	253VAC
Max. switching current	90A
Rated switching power	19800VA
Mechanical endurance	1×10^5 OPS

Notes:1)The data shown above are initial values.

2) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continuous measurements for each sample.

CHARACTERISTICS

Insulation resistance	1000M Ω (at 500VDC)	
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	2000VAC 1min
Creepage distance	8mm	
Set time (at nomi. volt.)	20ms max.	
Reset time (at nomi. volt.)	20ms max.	
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance	10Hz to 55Hz 1.5mm DA	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C	
Termination	Coil termination	PCB&QC
	Load termination	QC
Unit weight	Approx. 100g	
Construction	Dust protected	

Notes: The data shown above are initial values.

COIL

Coil power	Single coil latching: Approx. 1.5W Double coils latching: Approx. 3.0W
------------	---

COIL DATA

at 23°C

Single coil latching

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾ max.	Pulse Duration (Recommended) ms	Coil Resistance x (1 \pm 10%) Ω
5	≤ 3.5	50~100	16
6	≤ 4.2	50~100	24
9	≤ 6.3	50~100	54
12	≤ 8.4	50~100	96
24	≤ 16.8	50~100	384
48	≤ 33.6	50~100	1536

Double coils latching

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾ max.	Pulse Duration (Recommended) ms	Coil Resistance x (1 \pm 10%) Ω
5	≤ 3.5	50~100	8+8
6	≤ 4.2	50~100	12+12
9	≤ 6.3	50~100	27+27
12	≤ 8.4	50~100	48+48
24	≤ 16.8	50~100	192+192
48	≤ 33.6	50~100	768+768

Notes:1) The data shown above are initial values and recommended driving voltage is 1~1.5times of rated voltage.

ELECTRICAL ENDURANCE

UC Class	Voltage (Uc)	Current (Ic)	Power Factor	Close Open time (s)	Electrical endurance (OPS)
445 (UC1)	220VAC	60A	COS ϕ =1	10:20	3000
		10A	COS ϕ =0.4		3000
Nil	265VAC	60A	COS ϕ =1		5000
			COS ϕ =0.5		5000
					Total:6000
					Total:10000

Notes: 1) Electrical endurance meet IEC62055-31 test requirement, do the inductive load test after the resistive load test.

2) Only some typical ratings of UC are listed above, if more special ratings required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2019 Rev. 1.00

ORDERING INFORMATION

HFE19 -90/ 12 D T 2 1 -R (445)(XXX)	
Type	
Contact rating	90: 90A
Coil voltage	5,6,9, 12, 24,48 48VDC
Contact form ¹⁾	D: 1 Form B H: 1 Form A
Contact material	T: AgSnO ₂
Coil angle form	2: Distance 5mm; No bowleg 4: Distance 5mm; L-bowleg
Sort	1: Single coil latching 2: Double coils latching
Polarity	R: Negative polarity Nil: Positive polarity
Special code	(445): Normal type
Special code ²⁾⁴⁾	XXX: Customer special requirement

Notes: 1) H means that relay is on the "reset" status when delivery; D means that relay is on the "set" status when delivery. If no speical required by customer, we will keep the relay on the "set" status when delivery.

2) UC1: Meet the UC1 requirements on IEC62055-31;Relays are able to pass the 30Imax short circuit.

3) We can make special design according to customer's requirement,Please see the typical design.

4) The customer special requirement express as special code after evaluating by Hongfa. e.g. (459): Coil pins with reverse eduction way.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions


L-bowleg

No bowleg

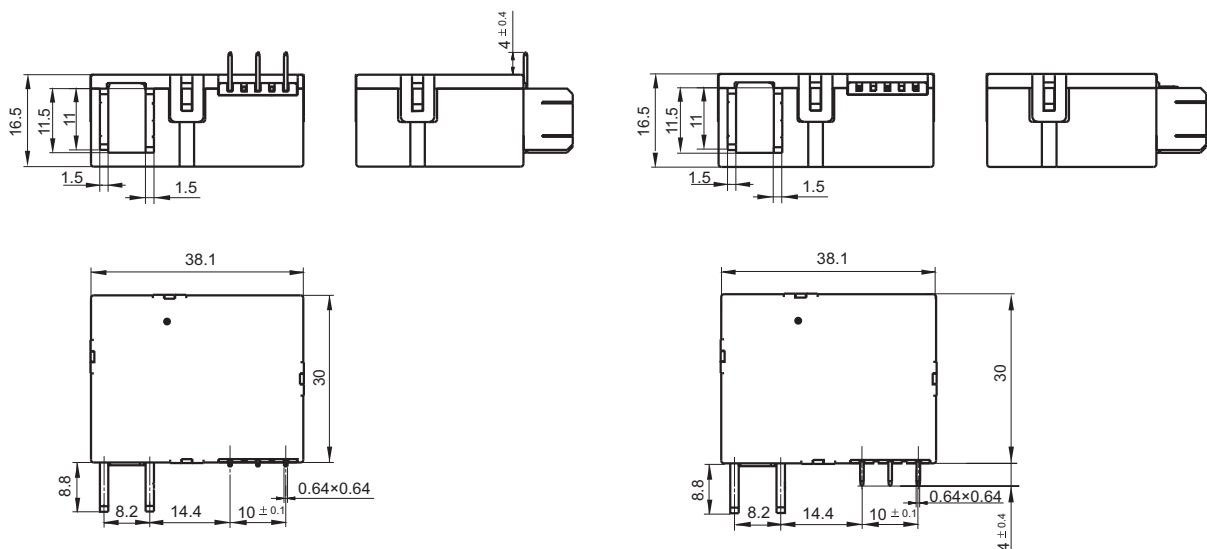


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

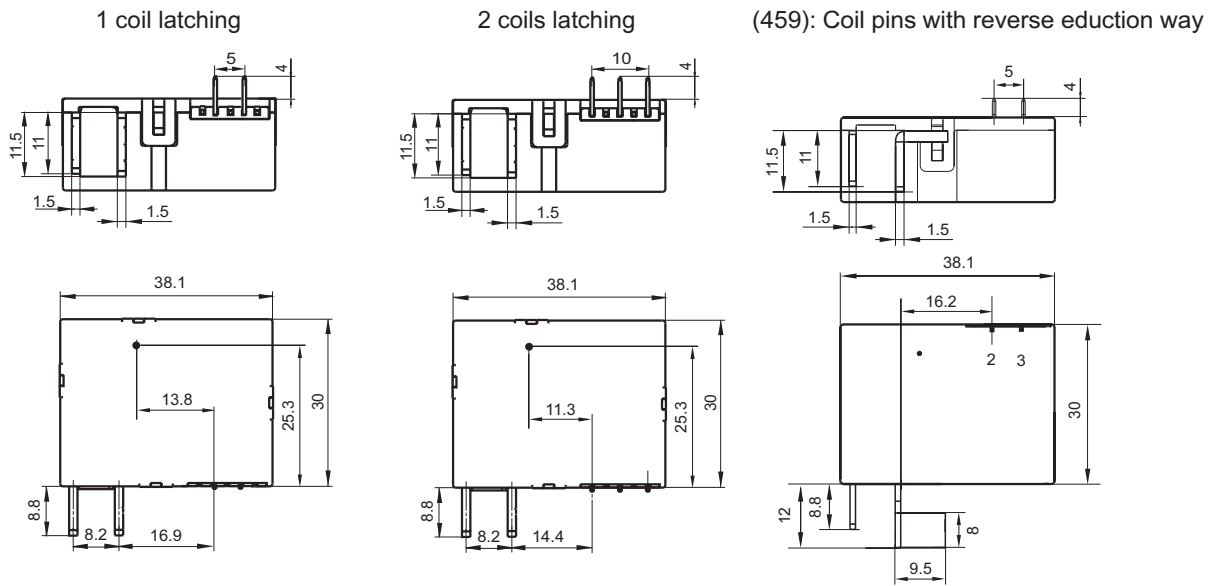


PCB Layout (Bottom view)

Single coil latching




Double coils latching




Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.



Wiring Diagram (Bottom view)




Positive polarity



Negative polarity

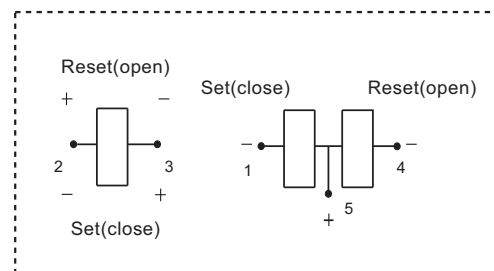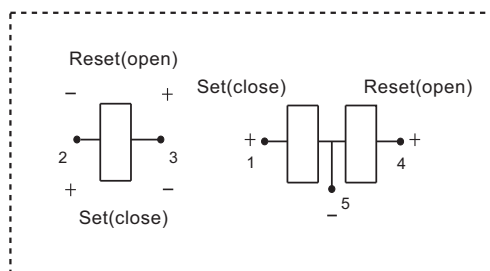

Typical Design

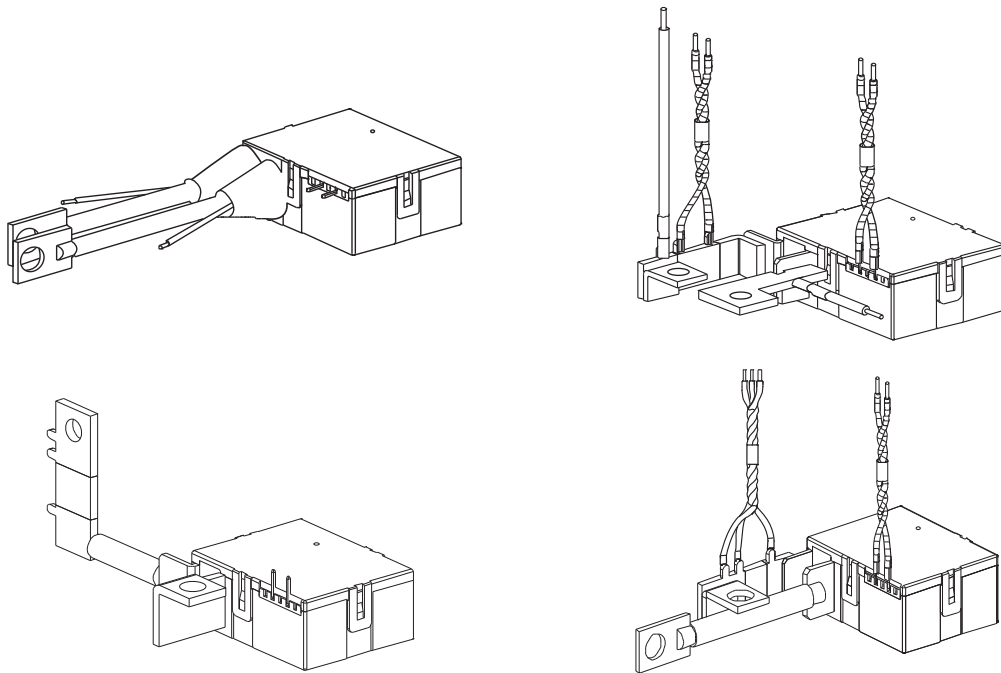

Remark: The drawing shown above are typical design, we can make special design according to customer's requirement. Please provide us with the drawing.

Notice:

1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
2. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress, or freely move.
4. Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.